



Rec'd PCT/PTO 19 JUL 2004  
PCT/EP 03 / 0051Z #2



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

REC'D 24 FEB 2003


WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

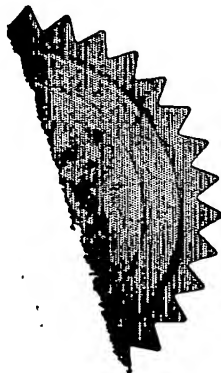

Signed

*[Signature]*


Dated 23 January 2003

**BEST AVAILABLE COPY**

**BEST AVAILABLE COPY**

**Request for grant of a patent** 9 JAN 2002

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



19 JAN 2002

The Patent Office

Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference	TECU / P25789GB	
2. Patent application number (The Patent Office will fill in this part)	<b>0201239.1</b>	<del>21JAN02 E009381-6 D02006</del> P01/7700 0.00-0201239.1
3. Full name, address and postcode of the or of each applicant (underline all surnames)	<b>Stichting voor de Technische Wetenschappen</b> Van Vollenhovenlaan 661 3527 JP Utrecht The Netherlands  Patents ADP number (if you know it) <span style="margin-left: 200px;">7828536001</span>  If the applicant is a corporate body, give the country/state of its incorporation <span style="margin-left: 100px;">The Netherlands</span>	
4. Title of the invention	TISSUE IMAGING AT SUPERHARMONIC FREQUENCIES	
5. Name of your agent (if you have one)  "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	<b>ERIC POTTER CLARKSON</b> <b>PARK VIEW HOUSE</b> <b>58 THE ROPEWALK</b> <b>NOTTINGHAM</b> <b>NG1 5DD</b>  Patents ADP number (if you know it) <span style="margin-left: 100px;">1305010 ✓</span>	
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:	YES	
a) any applicant named in part 3 is not an inventor; or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))		

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 13 /  
Claims(s) 4 /  
Abstract 1 /  
Drawing(s) 9 + 9 Rm

10. If you are also filing in any of the following, state how many against each item.

Priority Documents 0  
Translations of priority documents 0  
Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) YES /  
Request for preliminary examination and search (*Patents Form 9/77*) YES /  
Request for substantive examination (*Patents Form 10/77*) NO  
Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature   
ERIC POTTER CLARKSON

Date  
18 January 2002

12. Name and daytime telephone number of person to contact in the United Kingdom 0115 9552211

## Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

# TISSUE IMAGING AT SUPERHARMONIC FREQUENCIES

The present invention relates to imaging systems that use acoustic energy to reveal detail of the internal structure of a subject, such as a human or animal  
 5 body. In particular, the invention relates to ultrasonic imaging systems for medical applications, suitable for direct imaging of tissue and fluids in the body.

Ultrasonic imaging systems are in widespread use in the medical field for  
 10 providing images of the internal tissue structure of a patient's body. An excitation beam of ultrasound energy is transmitted into the body tissue and the reflected ultrasound energy echoes are detected, using an appropriate transducer.

During propagation of ultrasound in body tissue, the ultrasound waves  
 15 undergo gradual distortion in almost every medical application. The distortion is due to slight non-linearities in the sound propagation through the tissue and other body structures, that gradually deform the shape of the wave, and result in the generation of harmonic frequencies which were not  
 20 present in the transmitted excitation beam. The harmonic frequencies in the reflected beam (echoes) are non-linear and are created when ultrasound waves interact with the tissue.

Until a few years ago, it was widely accepted that these higher frequencies  
 25 were too small to be measured in the human and animal body. Nevertheless these assumptions became invalid at the frequencies and intensities that became available on biomedical ultrasound equipment. Selective imaging using information contained in second harmonic frequencies proved to be useful in improving ultrasound images. This was found to be particularly  
 30 true for a class of patients who are technically difficult to image using

ultrasound techniques. These technical difficulties may be due to physical characteristics or health conditions such as obesity, pulmonary disease or prior chest surgery. These factors can create haze and other image artefacts and may obscure essential information, such as severe ventricle wall motion abnormalities in stress echocardiography.

This technology, called tissue harmonic imaging, is based on the second harmonic energy at for example 3.4 MHz from an excitation beam frequency at 1.7 MHz. It exploits the gradual generation of the second harmonic frequency as ultrasound waves propagate through tissue. A considerable improvement in image quality is seen.

This improvement can be attributed to different mechanisms. Firstly, the amount of second harmonic energy present at the transducer face is small compared to the fundamental energy. The second harmonic component develops gradually as the wave propagates through tissue, and therefore in the nearfield there is only a small amount of second harmonic energy available for reflection from tissue. This is particularly shown in the graph of figure 1, which illustrates the ultrasonic acoustic pressure levels of both the fundamental (H) and second harmonic (2H) components as a function of axial distance from the transducer, in the tissue being imaged. Consequently, selective imaging of the second harmonic energy shows less nearfield artefact.

The second mechanism is related to the strength of the second harmonic component. The second harmonic energy is approximately proportional to the square of the energy in the fundamental wave. Thus, most of the second harmonic energy will be concentrated around the strongest part of the fundamental beam (the main lobe), while the weaker parts of the fundamental beam (the grating lobes and side lobes) will generate much less

second harmonic energy. This means that the second harmonic beam is less sensitive to clutter and off-axis scatter, giving better and cleaner images. Figure 2 illustrates the normalised acoustic pressure levels in tissue of the fundamental (F) and second harmonic (2H) beams as a function of distance from the transmitted beam axis.

With the selective use of the second harmonic frequency signal, there is a sacrifice of a certain amount of dynamic range. In current equipment specifications, the mechanical index:

10  $MI = (\text{peak negative pressure in MPa}) / \sqrt{(\text{frequency in MHz})}$   
is permitted to be as high as 1.9. It is known that in most extreme situations, the amount of second harmonic energy returning from tissue is much less than that reflected at the fundamental frequency. The second harmonic signal is 10 to 15 dB less than the fundamental signal. Thus, to use the  
15 second harmonic components, there must be excellent sensitivity and dynamic range in the ultrasound receiver to display the harmonic energy without an unacceptable level of thermal noise.

Moreover, the second harmonic energy in the nearfield is also not entirely  
20 suppressed and thus is vulnerable to reverberations, particularly arising in ultrasound scans through fatty tissue, ribs and inhomogeneous layers. These problems arise particularly in the class of technically difficult patients discussed above, who yield the worst baseline image. Particular problems in this regard are also encountered when trying to image in awkward locations,  
25 for example in cardiological applications while trying to image from a location between the ribs.

The present invention is directed towards a method and apparatus for improved acoustic imaging of tissue within a subject.

According to one aspect, the present invention provides a method for ultrasound imaging comprising the steps of:

transmitting ultrasound energy into a target volume at at least a first fundamental frequency;

5 receiving reflected and/or scattered ultrasound energy from the target volume; and

detecting components of the received signal at multiple harmonics of the fundamental frequency.

10 According to another aspect, the present invention provides a method for ultrasound imaging comprising the steps of:

transmitting ultrasound energy into a target volume at at least a first fundamental frequency;

15 receiving reflected and scattered ultrasound energy from the target volume; and

detecting components of the received signal at one or more of the third harmonic, the fourth harmonic, the fifth harmonic or a higher harmonic of the fundamental frequency.

20 According to another aspect, the present invention provides an apparatus for ultrasound imaging comprising:

a transmitter for transmitting acoustic energy into a target volume at at least a first frequency;

25 a receive transducer for receiving reflected and/or scattered acoustic energy from the target volume over a plurality of frequencies; and

a filter for detecting components of the received signal at multiple harmonics of the fundamental frequency.

30 According to another aspect, the present invention provides an apparatus for ultrasound imaging comprising:

a transmitter for transmitting ultrasound energy into a target volume at at least a first fundamental frequency;

a receive transducer for receiving reflected and/or scattered ultrasound energy from the target volume; and

5 a filter for detecting components of the received signal at one or more of the third harmonic, the fourth harmonic, the fifth harmonic or a higher harmonic of the fundamental frequency.

Embodiments of the present invention will now be described by way of example and with reference to the accompanying drawings in which:

Figure 1 is a graph showing the relative acoustic pressure levels in tissue at the fundamental and second harmonic frequencies as a function of axial distance from an acoustic transmitter;

Figure 2 is a graph showing the normalised acoustic pressure levels in  
15 tissue at the fundamental and second harmonic frequencies as a function of lateral distance from the central axis an acoustic transducer transmitted beam;

Figure 3A is a graph showing the relative power levels in a received ultrasound signal as a function of the transmitter frequency (harmonic  
20 number);

Figure 3B is a series of graphs showing the relative acoustic pressure levels in the received ultrasound signal over time as a function of the transmitter frequency;

Figure 4 is a graph showing the relative acoustic pressure levels in  
25 tissue at the fundamental (F) and second harmonic (2H) frequencies as a function of axial distance from an acoustic transducer, together with the corresponding level for the combined third to fifth harmonic frequencies (SH);

Figure 5 is a graph showing the normalised acoustic pressure levels in  
30 tissue at the fundamental and second harmonic frequencies as a function of



lateral distance from the central axis an acoustic transducer beam, together with the corresponding level for the higher harmonic frequencies;

Figure 6 shows B-mode images of a tissue phantom containing a water cavity using (a) the second harmonic frequency information and (b) the higher harmonic frequencies 3H, 4H and 5H;

Figure 7 shows video intensity levels obtained from the images of figure 6; and

Figure 8 shows a schematic block diagram of an ultrasound imaging system according to one embodiment of the invention.

10

According to the present invention, it has surprisingly been discovered that sufficient reflected and scattered ultrasound energy can be received directly from tissue and fluids in a target body to be useful in imaging applications, ie. without the use of contrast agents.

15

With reference to figures 3A and 3B, it will be observed that at available excitation pressures the levels of harmonic components generated in the tissue and reflected to the transducer are relatively high. It is clear that a significant amount of energy is converted and transferred from the fundamental frequency to the harmonic frequencies up to at least the fourth and the fifth harmonic components. The examples shown are obtained using a transmit (excitation) frequency of 1.7 MHz, the medium being tissue with the following physical characteristics: attenuation coefficient  $\alpha = 0.7$  dB/cm/MHz and non-linearity coefficient  $(B/A) = 8.5$ . The mechanical index (MI) used was 1.3.

25

In the received signal, the second harmonic component is approximately 8 dB below the fundamental component and the fifth harmonic is only about 20 dB below the fundamental component. The higher harmonic components

represent additional information, which can be more relevant and with characteristics that are superior to the second harmonic alone.

5 A presently preferred technique to take advantage of the higher harmonics and to bring all the information together is to combine and incorporate all the higher harmonics into a single component which we will refer to as the superharmonic component.

10 The superharmonic component can have different combinations. It may include the third harmonic, the fourth harmonic and the fifth harmonic all together, which can be combined at the detector using a wide band frequency filter. Alternatively, the superharmonic component may comprise the second harmonic frequency up to the fifth harmonic frequency. Other harmonic combinations, such as 2+3+4, 3+4, 2+3, etc are within the scope  
15 of the present invention.

The extra information that is brought by the superharmonic component when compared to the second harmonic alone provides different advantages for ultrasound imaging.  
20

First, the distortion of the ultrasound wave is gradual, which means that the harmonic frequency energy rises with propagation distance. As shown in figure 4, at the transducer surface, the second harmonic energy is about 35 dB below the fundamental energy whereas the superharmonic energy is  
25 about 70 dB below the fundamental energy.

The relatively low level of the superharmonic energy upon entry to the body being imaged means that imaging artefacts caused by reverberations at boundaries in the body being imaged are significantly reduced or eliminated.  
30 For example, when imaging through a narrow acoustic window, such as

between the ribs, the artefacts introduced by the ribs (clutter, noise, reverberations, haze) may be substantially reduced or eliminated entirely using the superharmonic component.

- 5 The second advantage of using the superharmonic component is that it builds up with transmission distance. Even though the superharmonic component ( $3H + 4H + 5H$ ) is much lower than the second harmonic component at the chest wall, it builds up so fast (see figure 4) that at imaging distances of a few centimetres, enough superharmonic energy has been
- 10 generated from the fundamental beam to yield a significant superharmonic component. Also as shown in figure 4, at imaging distances of 5 cm in the example given, the superharmonic component surprisingly is even higher than the second harmonic component.
- 15 A third advantage of the use of the superharmonic component is the substantial removal of off-axis echoes. As shown in figure 5, the generation of superharmonic components is substantially confined to the strongest part of the fundamental beam, even more so than is the second harmonic. This has the beneficial effect that the superharmonic beam width is much
- 20 narrower than the second harmonic beam width. The beam width at the superharmonic frequency is found to be half of the transmitted fundamental beam width, whereas the second harmonic beam width is only 30% narrower. For example, for a beam width of 5.3 mm (around the focal point), and 3.5 mm at the second harmonic, the superharmonic components
- 25 ( $3H + 4H + 5H$ ) have a beam width of less than 2.6 mm. The narrow beam width using the superharmonic component results in a substantial enhancement in lateral resolution, eg. by a factor of two. Moreover, the superharmonic energy is substantially concentrated to the main beam and shows much lower side lobe and grating lobe levels.

A fourth advantage of the use of the superharmonic component is that problems associated with the spectral overlap between the transmitted and received signals is substantially eliminated. In second harmonic imaging systems, the spectral overlap between the fundamental frequency band and the second harmonic frequency band has to be reduced. This impairs the imaging resolution. Consequently a compromise is mandatory between the resolution and the sensitivity of the system. This compromise is not required in the superharmonic system since the receive frequency band is remote from the transmit frequency band. Moreover, since the receive frequency band is wide (eg. covering the third to fifth harmonics or more), the axial resolution is further increased.

Typically, in commercially available machines, the transmit frequency is a band of frequencies resulting from transmitting an excitation signal at the fundamental frequency containing 2.5 or 3 cycles. This means about 60% to 70% bandwidth either side of the centre frequency.

The superharmonic component generation is a highly non-linear process implying that only fundamental energy (and some second harmonic energy) above a certain level will give rise to superharmonic energy. This is critically important in many applications.

Selective superharmonic imaging will yield a dramatically cleaner and sharper contrast between different structures in the subject being imaged. Figure 6 shows two B-mode images of a tissue phantom containing a water cavity. The left-hand image was made using standard second harmonic imaging mode using a standard, commercially available probe. The transmit frequency was 1.7 MHz, and the MI = 1.3. The right-hand image was made using a superharmonic mode, combining the third to fifth harmonics (3H + 4H + 5H). The transmit frequency was 1.2 MHz, and the MI = 1.0. The

water cavity appears much darker and more sharply defined in the superharmonic image than in the second harmonic frequency image.

5 The combining of the higher harmonic components into a single superharmonic component is beneficial way of increasing the amount of detected energy compared to the second harmonic energy alone. Indeed, the distortion of the ultrasound waves in tissue is the mechanism by which energy is transferred to the harmonic frequencies and this energy is decreasingly split between all the harmonics. Use of the superharmonic  
10 energies effectively allows recovery of otherwise lost energy due to distortion into a usable and valuable information source.

The superharmonic energy level is often higher than the second harmonic energy level and in some situations can be even higher than the energy level  
15 in the fundamental component. For tissue harmonic imaging, the superharmonic beam offers better sensitivity, higher resolution and improved signal to noise ratio.

The threshold for superharmonic generation depends on frequency and  
20 acoustic pressure (MI). In practice, an MI value above 0.1 or 0.2 is required in order to generate superharmonic components that have sufficient energy to be detectable.

Figure 7 shows the video intensity level obtained from the images shown in  
25 figure 6. The left-hand graph shows the video level across a horizontal cut (made at the middle of the image in the horizontal plane), comparing the second harmonic image (solid line) and the superharmonic image (dashed line). The right-hand graph shows the video level across a vertical cut down the centreline of the image, again comparing the second harmonic image  
30 (solid line) and the superharmonic image (dashed line).

Figure 7 illustrates the high contrast of edges of structures (the water cavity) detected and displayed using the superharmonic frequencies compared to the second harmonic frequencies. Moreover, the video level inside the cavity is much darker (black video level = 0) in the superharmonic image than in the second harmonic image. The difference is up to 25%. These improvements result in much better edge detection (eg. in cardiology the detection of the left ventricle contour is of considerable importance), since the cavity is much darker and the walls are more sharply displayed. More generally, images generated using superharmonics have exceptionally improved clarity without the use of contrast agents.

With reference to figure 8, to utilise the methodology described above, a preferred embodiment of the present invention provides a wide band ultrasound imaging system 10. A transmit signal generator 11 is used to generate a transmit signal at frequency  $f_0$  which is supplied to a transmit transducer 12 in conventional manner. Transducer 12 insonifies the object 5 under analysis, by transmission of an ultrasound excitation beam 14 at frequency  $f_0$  into the object 5. The object is typically the human or animal body.

Within the object 5, propagation of the transmitted beam 14 results in generation of harmonics in the scattered and reflected beam, which therefore comprises energy at the frequencies  $f_0, 2f_0, 3f_0, 4f_0, 5f_0, 6f_0$  etc.

A wide band receive transducer 16 detects the reflected acoustic signal and converts the acoustic energy into an electrical signal 17, including at least the fundamental frequency  $f_0$  up to the fifth harmonic  $5f_0$ . This is filtered according to a desired strategy, to extract signals in one or more frequency

bands, eg.  $3f_0 + 4f_0 + 5f_0$ ; or  $2f_0 + 3f_0 + 4f_0 + 5f_0$ ; or  $2f_0 + 3f_0 + 4f_0$ , etc. A preferred transducer is a dual frequency probe.

Such a dual frequency probe was used to generate the images of figure 6.  
5 Preferably, the transducer transmits an excitation beam in the range 1 MHz to 10 MHz. In another preferred embodiment, the transducer transmits at 1.2 MHz and receives in the frequency band 3.6 MHz to 6 MHz. In another preferred embodiment, the transmit transducer and the receive transducer are provided in a single broadband transducer probe. Echo signal samples may  
10 be delayed by a beam former to form a coherent signal.

The receive filter 18 may be of any type suitable for the purpose, such as an FIR filter comprising a series of multipliers and accumulators and a controller to weight the multiplying factors. Other signal processing  
15 techniques besides filtering may be used to separate the superharmonic components from the received echo information.

A suitable signal processor and display device 20 is used to generate an image using the received superharmonic signals. In a preferred  
20 embodiment, the signal processor 20 uses the selected harmonics only.

In another embodiment, the image may be generated using information from one or more harmonics, subsequently processed or refined using information from other harmonics. For example, image information may be gathered  
25 from two superharmonic combinations, such as  $(2H + 3H)$ , and  $(4H + 5H)$ , and a compound (composite) image generated using the average, sum or difference.

The superharmonic imaging system 10 may incorporate a Doppler processor  
30 for Doppler processing according to conventional techniques.

In summary, the use of superharmonic components as described herein provides at least the follow advantages. Superharmonics have almost no energy in the nearfield, resulting in minimal or no reverberations or multipath reflections. Sidelobes and grating lobes of the superharmonic components are much lower than fundamental and second harmonic components, resulting in much reduced clutter and noise from off-axis scatterers. The superharmonic energy at typical imaging distances in the human body is higher than the second harmonic energy, and in some situations (eg.  $SH = 2H + 3H + 4H + 5H$ ), can be even higher than the fundamental energy. This results in a much higher signal to noise ratio and sensitivity. For superharmonic imaging, axial and lateral resolutions are better than for second harmonic imaging and the compromise between sensitivity and resolution does not exist.

15



## CLAIMS

1. A method for ultrasound imaging comprising the steps of:  
transmitting ultrasound energy into a target volume at at least a first  
fundamental frequency;  
5 receiving reflected and/or scattered ultrasound energy from the target  
volume; and  
detecting components of the received signal at multiple harmonics of  
the fundamental frequency.
- 10 2. The method of claim 1 further comprising generating an image of the  
target volume using the multiple harmonic components of the received  
signal.
3. The method of claim 1 or claim 2 wherein the detected components  
15 comprise the second harmonic and at least one higher harmonic.
4. The method of claim 1 or claim 2 wherein the detected components  
comprise the third harmonic and at least one higher harmonic.
- 20 5. The method of claim 4 wherein the detected components comprise  
the third, fourth and fifth harmonics.
6. A method for ultrasound imaging comprising the steps of:  
transmitting ultrasound energy into a target volume at at least a first  
25 fundamental frequency;  
receiving reflected and scattered ultrasound energy from the target  
volume; and  
detecting components of the received signal at one or more of the  
third harmonic, the fourth harmonic, the fifth harmonic or any higher  
30 harmonics of the fundamental frequency.

7. The method of claim 6 further comprising generating an image of the target volume using only the detected harmonic component.
- 5 8. The method of any preceding claim wherein the detected components relate to received ultrasound energy from tissue.
9. The method of any preceding claim in which the target volume comprises a human or animal body.
- 10 10. The method of any preceding claim in which the transmit energy is within the range of 1 to 2 MHz and the detected components of the received signal lie at least in the range 3.6 to 6 MHz.
- 15 11. The method of any preceding claim further including the step of separately detecting image information in at least two different groups of the second and higher harmonic frequency bands and generating a compound image from said at least two different groups.
- 20 12. Apparatus for ultrasound imaging comprising:  
a transmitter for transmitting acoustic energy into a target volume at at least a first frequency;  
a receive transducer for receiving reflected and/or scattered acoustic energy from the target volume over a plurality of frequencies; and  
25 a filter for detecting components of the received signal at multiple harmonics of the fundamental frequency.
13. The apparatus of claim 12 further comprising signal processing means for generating an image of the target volume using the multiple  
30 harmonic components of the received signal.

14. The apparatus of claim 12 or claim 13 wherein the filter is adapted to detect the second harmonic and at least one higher harmonic of the fundamental frequency in the received signal.
- 5
15. The apparatus of claim 12 or claim 13 wherein the filter is adapted to detect the third harmonic and at least one higher harmonic of the fundamental frequency in the received signal.
- 10 16. The apparatus of claim 15 wherein the detected components comprise the third, fourth and fifth harmonics.
17. Apparatus for ultrasound imaging comprising:  
a transmitter for transmitting ultrasound energy into a target volume  
15 at at least a first fundamental frequency;  
a receive transducer for receiving reflected and/or scattered ultrasound energy from the target volume; and  
a filter for detecting components of the received signal at one or more of the third harmonic, the fourth harmonic, the fifth harmonic or higher  
20 harmonics of the fundamental frequency.
18. The apparatus of claim 17 further comprising means for generating an image of the target volume using only the detected harmonic component.
- 25 19. The apparatus of any one of claims 12 to 18 in which the transmitter is adapted to transmit acoustic energy within the range 1 to 2 MHz and the receive transducer is adapted to detect components at least within the range 3.6 to 6 MHz.

20. The apparatus of any one of claims 12 to 19 further including means for separately detecting image information in at least two different groups of the second and higher harmonic frequency bands and generating a compound image from said at least two different groups.

5

21. Apparatus substantially as described herein with reference to the accompanying drawings.

22. A method substantially as described herein with reference to the  
10 accompanying drawings.

## ABSTRACT

### TISSUE IMAGING AT SUPERHARMONIC FREQUENCIES

- 5    Ultrasound imaging of tissue in medical applications is carried out by transmitting ultrasound energy into a target volume at at least a first fundamental frequency, receiving reflected and/or scattered ultrasound energy from the target volume; and detecting components of the received signal at multiple harmonics of the fundamental frequency or at one or more
- 10   of the third to fifth harmonics of the fundamental frequency. An image of the target volume is generated using the detected harmonic components of the received signal.

Figure no.8

Figure 1

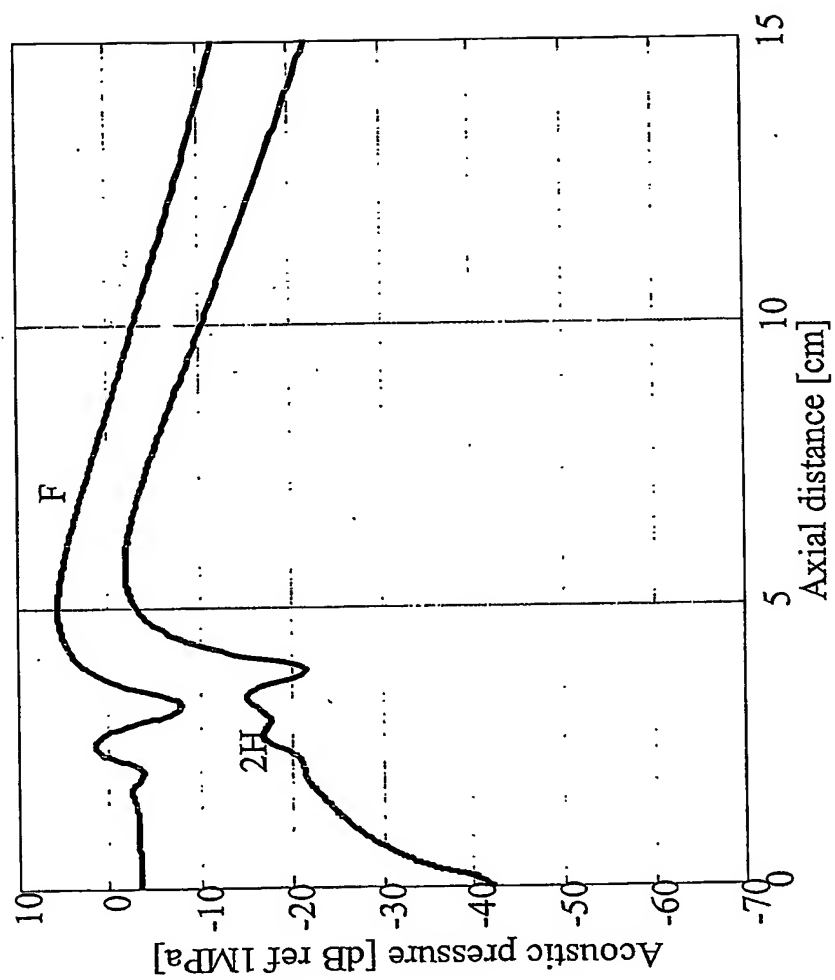


Figure 2

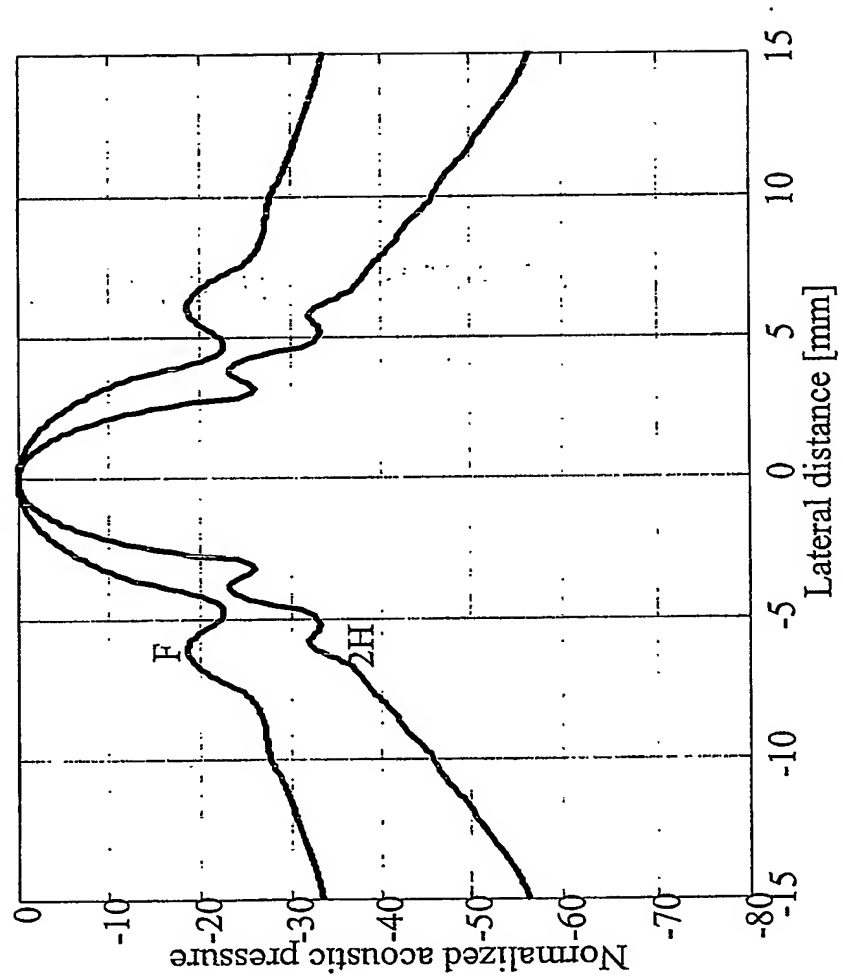


Figure 3A

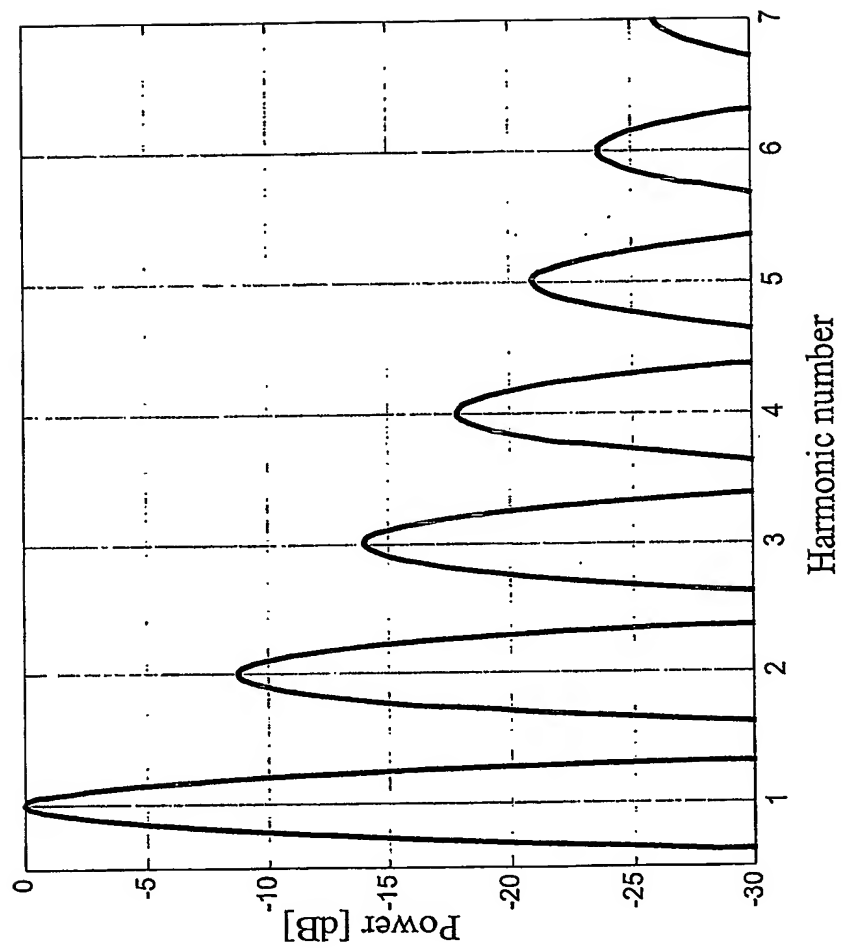




Figure 3B

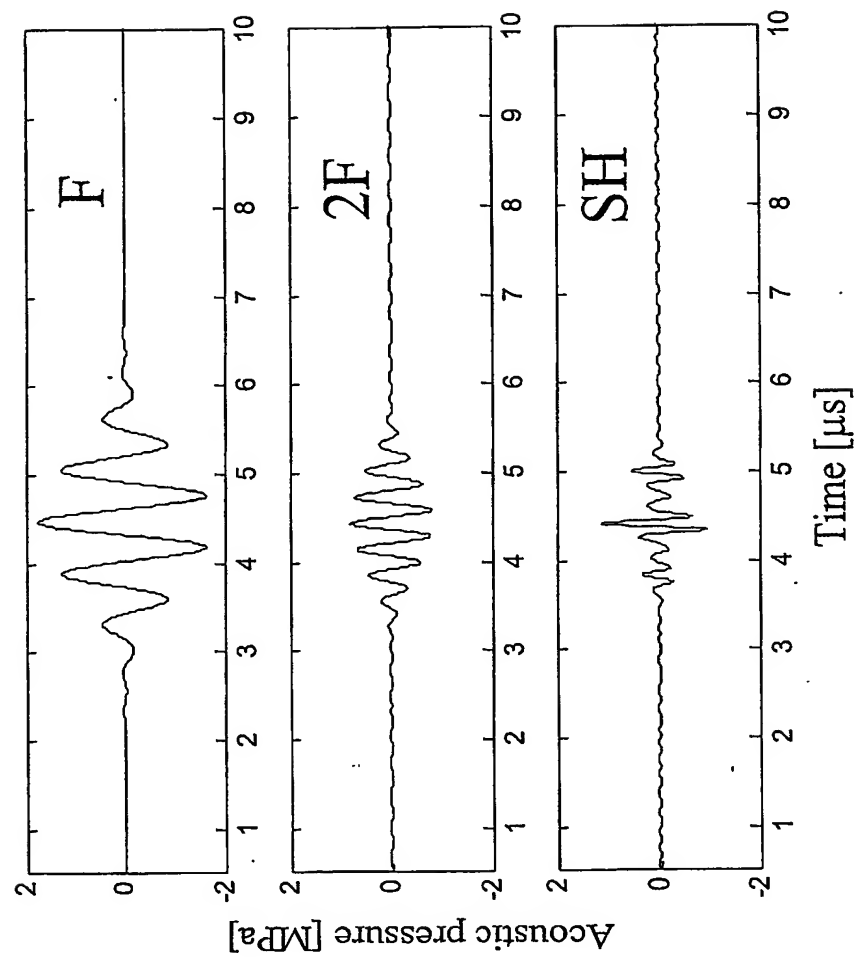


Figure 4

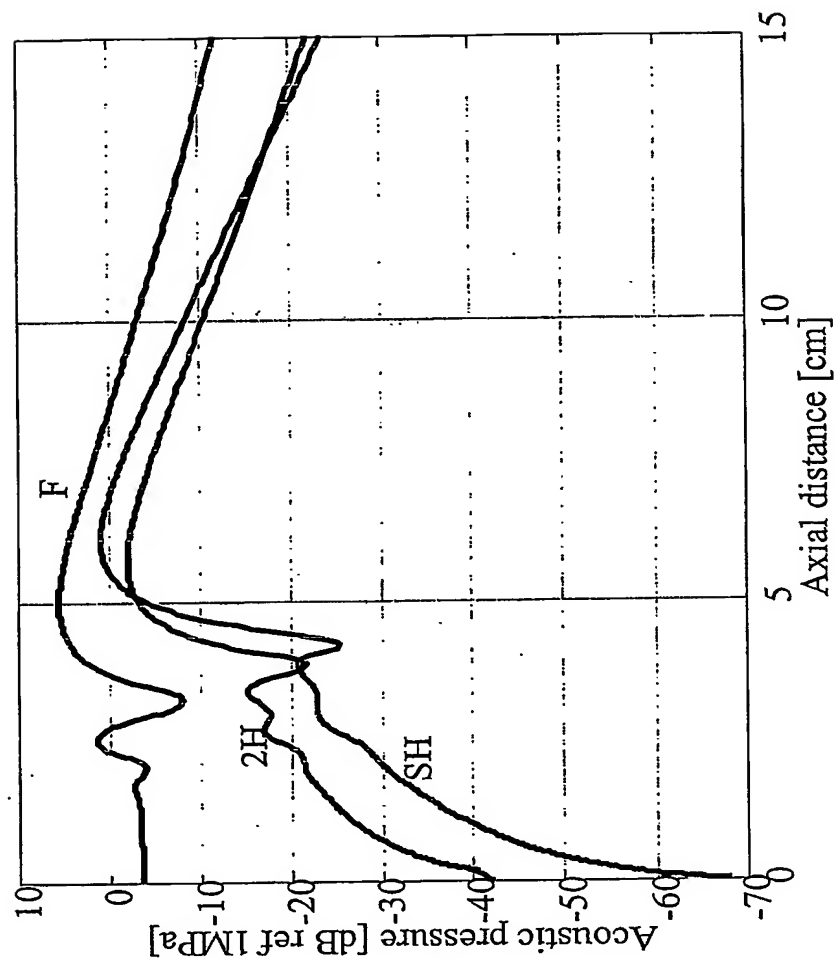


Figure 5

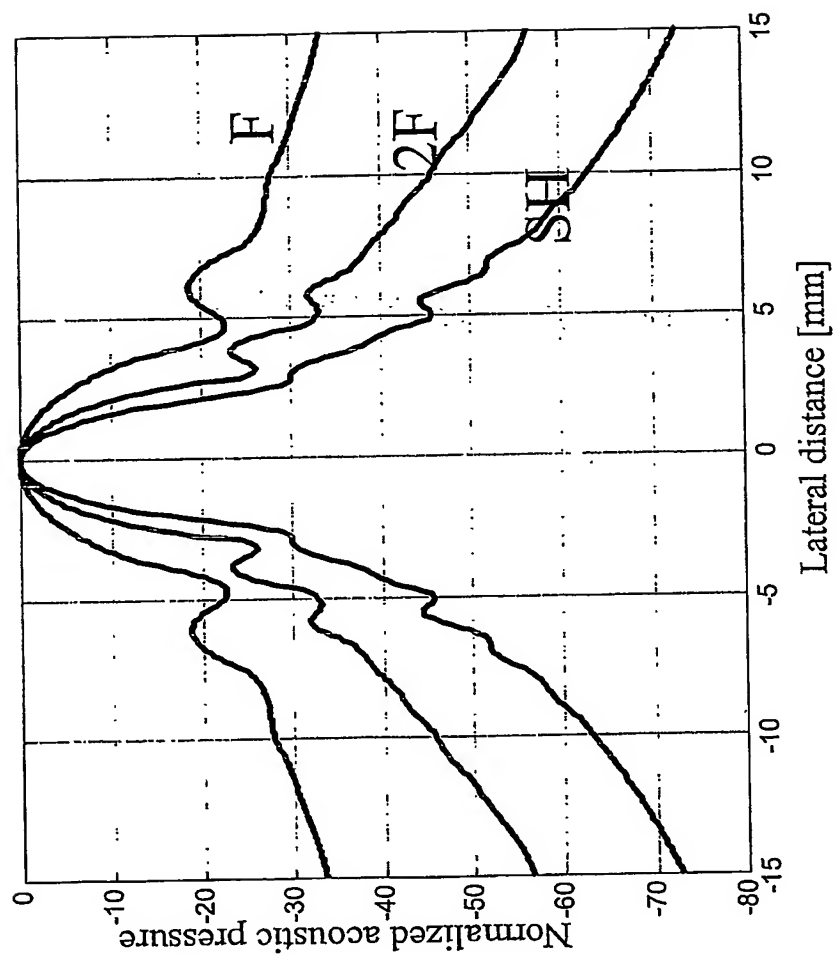


Figure 6

2<sup>nd</sup> Harmonic

Superharmonic

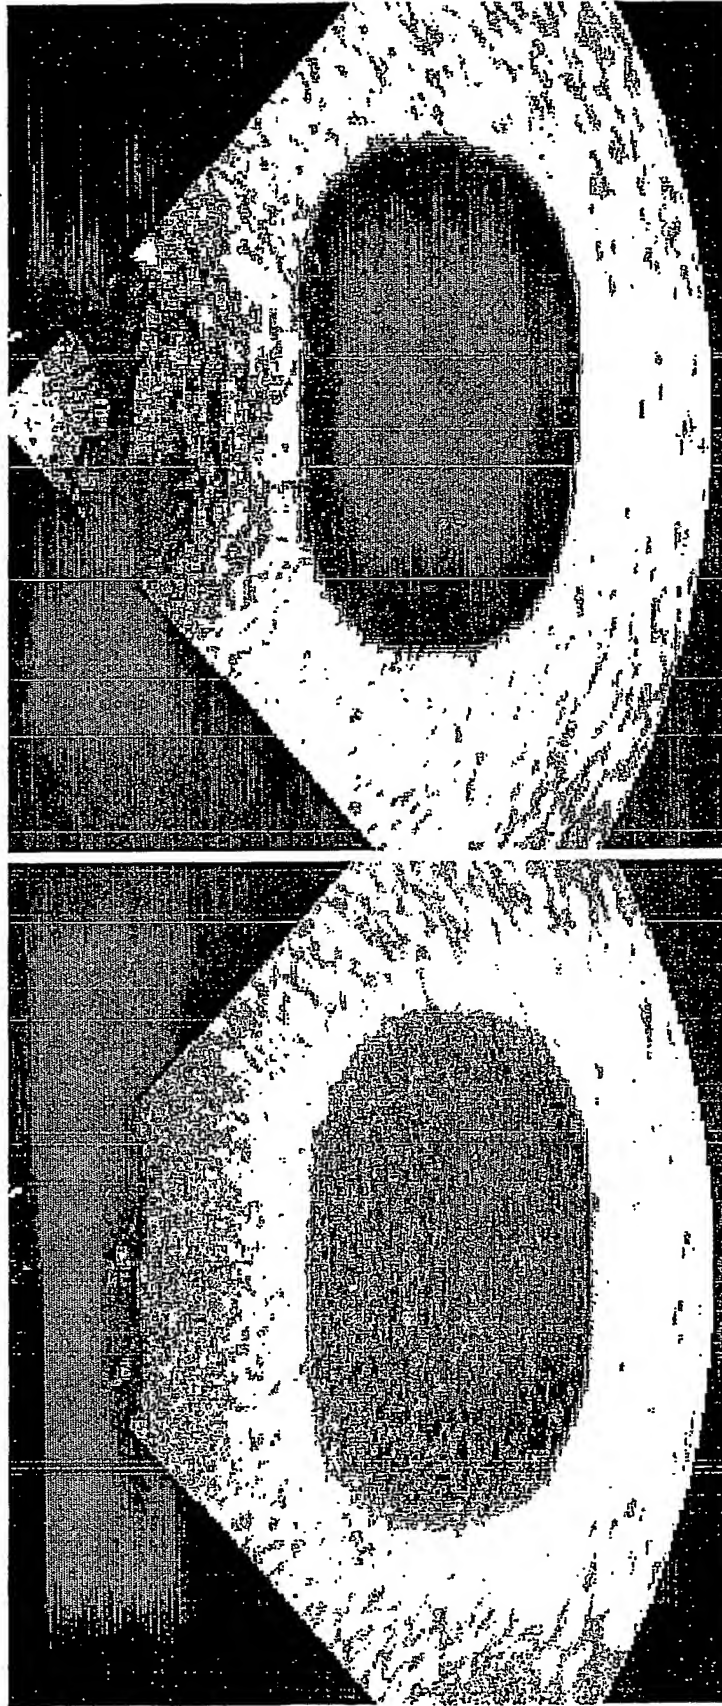
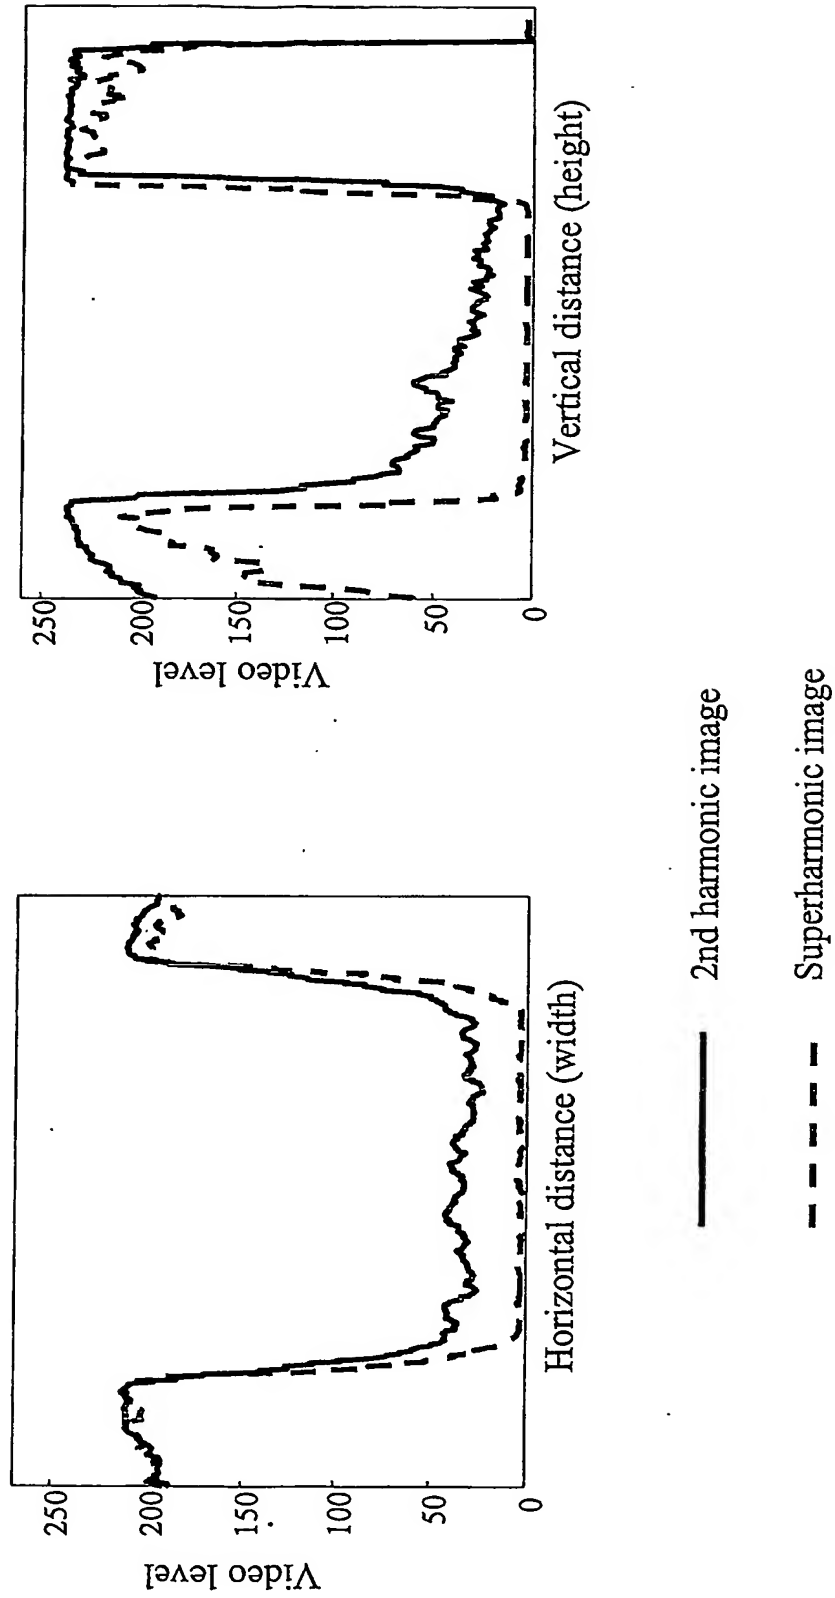


Figure 7



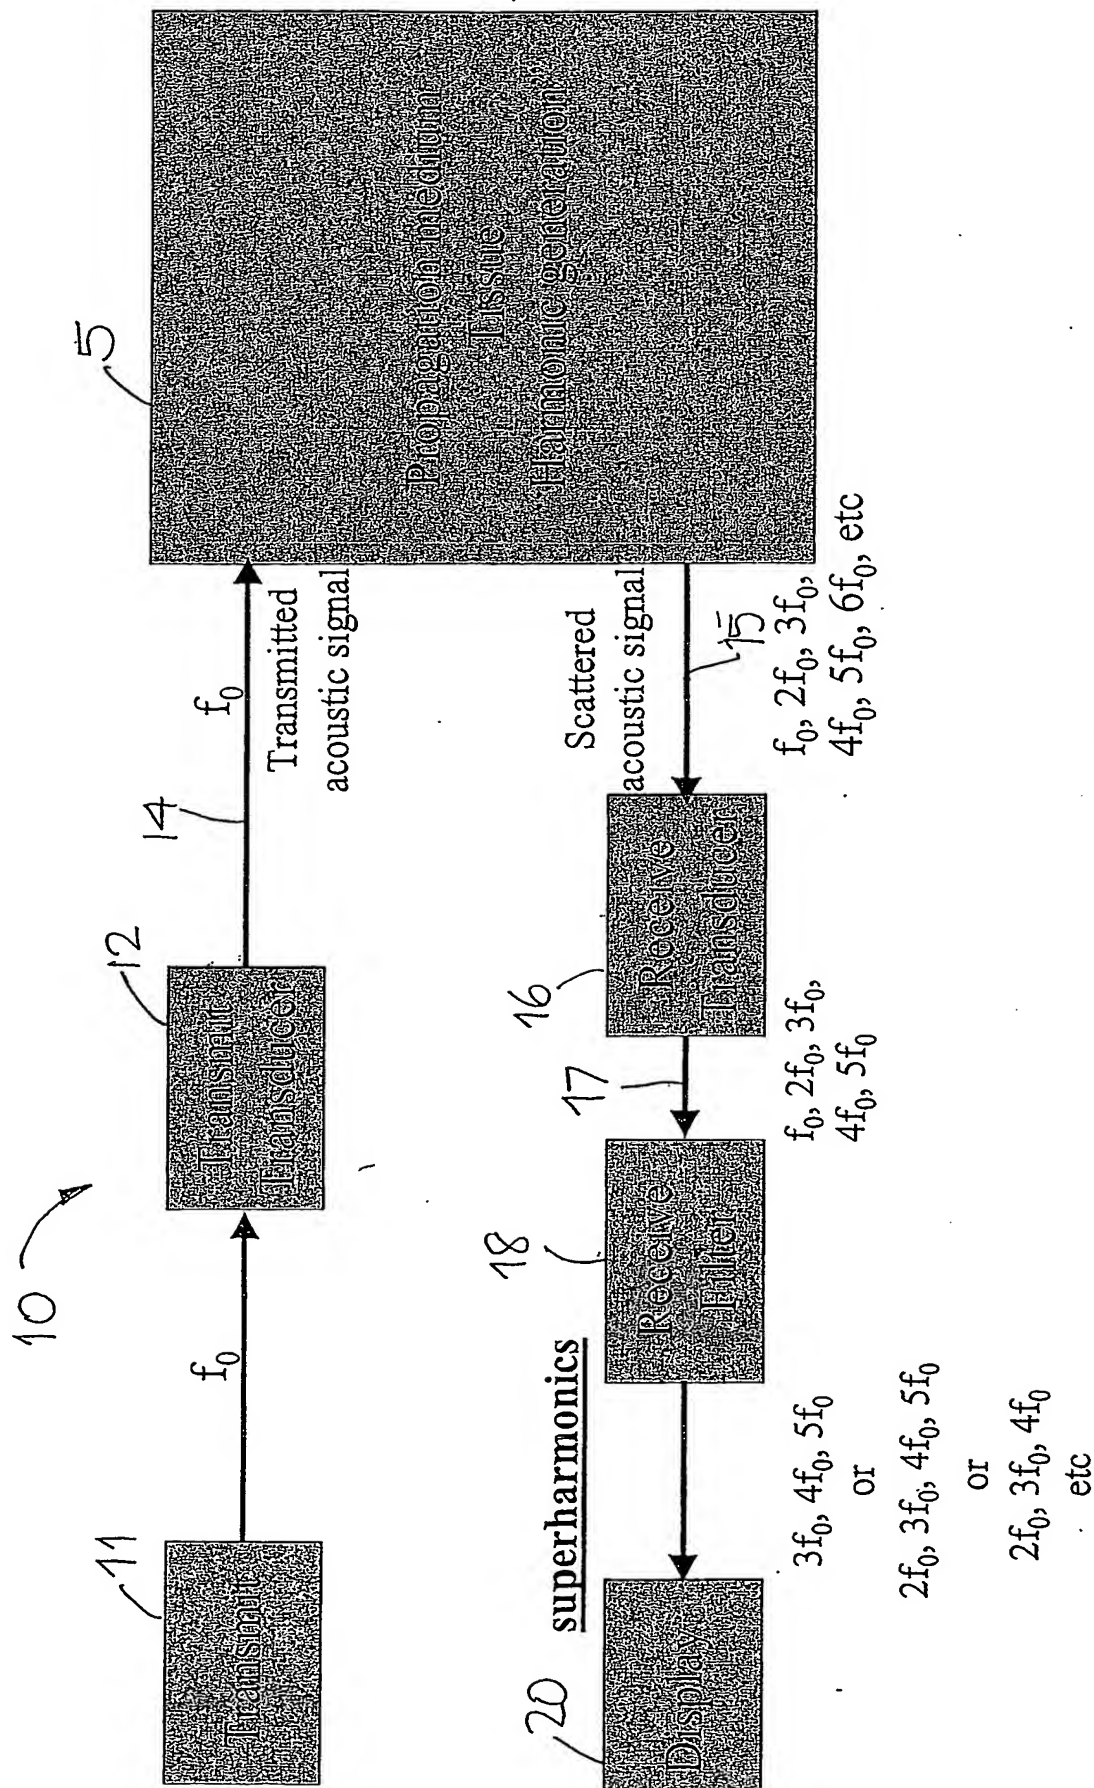


Figure 8

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**